




L&C

LABELING
& CODING

MFLEX™ TOP & BOTTOM C-WRAP PRESSURE-SENSITIVE LABEL APPLICATOR SYSTEM

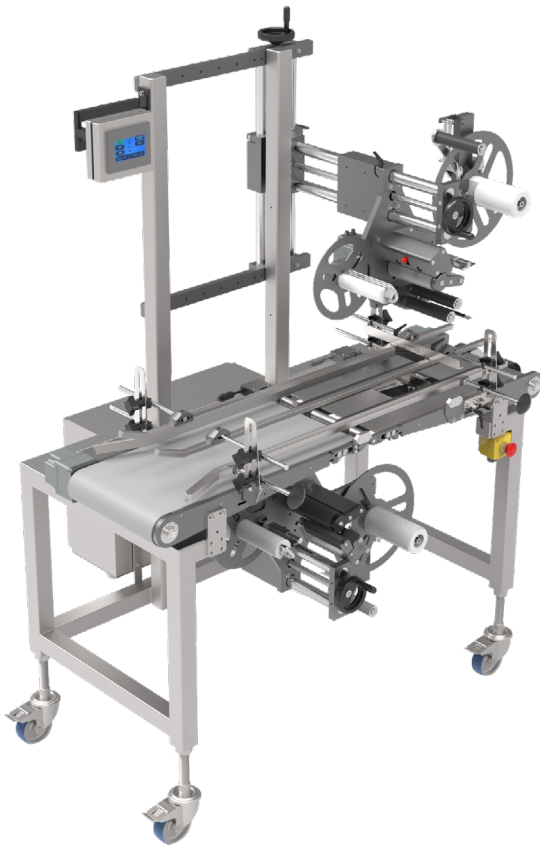

Engineered for Modularity and Flexibility

The most versatile MFlex system, featuring wipe-on applicators for top, bottom, and c-wrap applications, the MFlex Top & Bottom C-Wrap labeler is a popular option for contract packagers and companies that use several different package styles.

Composed of two label applicators and special dual conveyor system, the MFlex precisely labels a variety of packaging shapes and product types that provides an easy and flexible platform to not only control, but maintain.

Because the M2 labeling heads can be independently switched on or off, the system can also be used for top-only labeling, top and bottom labeling, bottom-only labeling, as well as c-wrap label applications as needed.

FEATURES AND BENEFITS

- Closed-loop electric servo system to ensure maximum synchronization and control
- Singular full color touch-screen HMI provides fast access to any adjustments as well as full diagnostics for maintenance.
- Built on a welded stainless steel frame, using non-corrosive components that feature IP65 protection.
- Modular components for maximum serviceability.
- Tool-free design for easy and fast adjustments.
- Compact high-powered brushless DC conveyor and product handling motors.
- Zero downtime option featuring redundant labeling heads for continuous labeling production.

COMMON APPLICATIONS






MFLEX™ TOP & BOTTOM C-WRAP PRESSURE-SENSITIVE LABELING SYSTEM

STANDARD PRODUCT SPECIFICATIONS

Label Supply	12" Diameter / 3" Core		Electrical	120V AC @ 6A, 60Hz
Label Size	Min: 1" x 2" Feed	Max: 5" x 12" Feed Max: 5" x 24" Feed*	Conveyor Speed	Variable up to 125ft per minute
Product Size	4" to 12" Wide	2" x 24" Long	Conveyor	Stainless Steel, Aluminum, UHMW
Operation	Closed-loop Electric Servo		IP Rating	IP65 Wet/Damp Environment

*Maximum c-wrap application label size (Top labeling head only).

CONFIGURATION

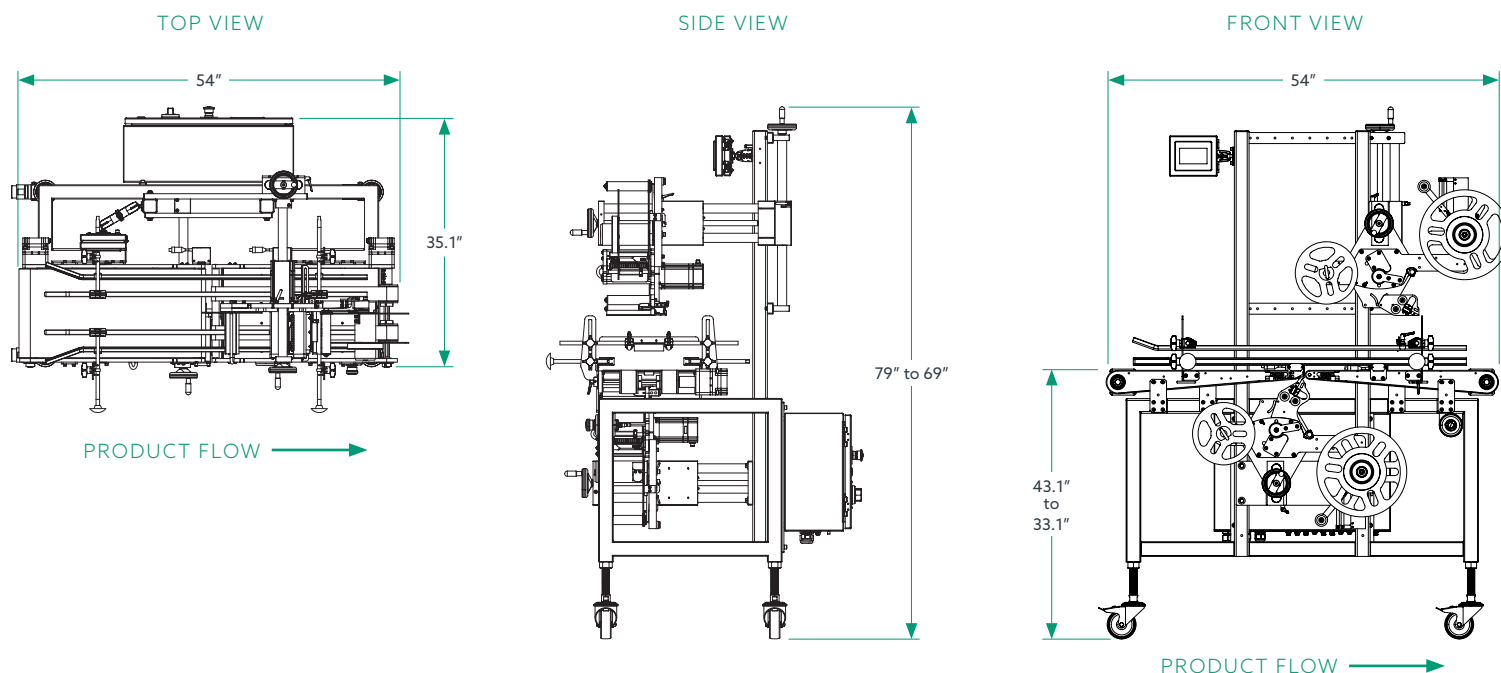

SYSTEM OPTIONS

- 16" (407mm) OD Label Supply
- Increased Label Width
- Low Label Supply Warning with Auto Shut-Off Feature and Beacon light
- Different Supply Voltage
- Clear Label Sensor Package
- Additional Conveyor Width
- Additional Conveyor Length
- Adjustable Feet
- Higher Speed

©2022 ProMach Inc. ProMach reserves the right to change or discontinue specifications and designs shown in this brochure without notice or recourse
EPI_SpecSheet_MFlex Top-Bottom C-Wrap_030322



PHONE
717-235-8345

TOLL FREE
800-755-8344

EMAIL
EPI@ProMachBuilt.com

WEB
EPILabelers.com

1145 East Wellspring Rd
New Freedom, PA 17349