

Engineered for simplicity. Built to operate 24/7.



U-II Labeler

The EPI U-II labeler combines simplicity, durability and flexibility all into one labeler that has the capability of meeting a wide variety of labeling applications. Available with either vac/blow or tamp applicators and 12" or 16" low tension unwinds, the U-II Labeler can be reconfigured in the field and offers a wide range of options to suit your ever changing needs. Our patented label stop compensator keeps label placement accurate to within 1/32" at speeds up to 225 labels per minute. A robust design will bring you years of service with a minimum of downtime.

WHY EPI?

For over 30 years EPI Labelers have been designed and engineered for reliability and ease of use. We take the time to understand each application and listen to our customers needs. Let us show you how Precise Thinking and Simple Design can help you.

Reliable

EPI Labelers are built to stand up to the daily use and harsh environments that come with the territory. Enclosed direct drive technology along with corrosion resistant material allows our labelers to work in dusty, wet and cold packaging operations with a minimum amount of maintenance required. Your operators and mechanics will appreciate EPI Labelers ease of set up and use.

Versatile

Sure, EPI Labelers are easy to set up and operate, but the versatility that is engineered into all our equipment allows you to use our labelers in a variety of applications. Whether your job calls for a non contact vacuum/blow, tamp or two panel application we can configure our labelers to meet your needs.

Quick and Easy Setup

Our customers tell us that EPI Labelers give them the ease of use that they have not experienced with other labeler equipment. The cantilevered design lends itself to easy threading and the simple mechanical adjustments needed to change label size make EPI Labelers a favorite of mechanics and operators everywhere.



Label Size: 1" x 1" to 6" x 6"
Smaller/Larger size optional

Label Supply: 12" OD on a 3" Core

Electrical: 2A @ 120 VAC, 60 HZ



Speed: 120/min
(based on 3" x 3" label)

Pneumatic: 2 SCFM, 80 PSI

Configurations: Vac/Blow
Tamp
Corner Wrap (Leading & Trailing)
2-Panel
Tamp/Blow

Optional Printing: A variety of printing solutions are available including inkjet, rotary or reciprocating printers.

Options: Supplied with a portable stand, or may be mounted to an existing conveyor.

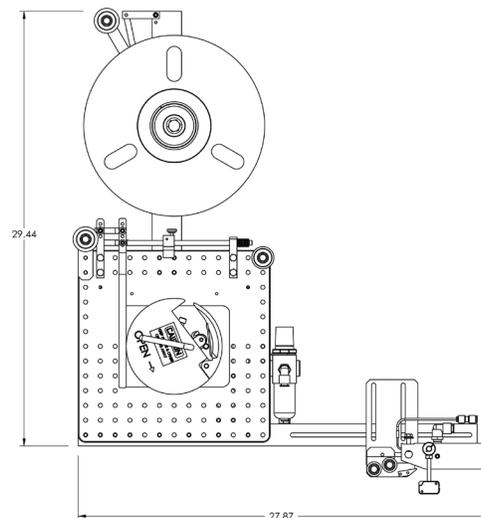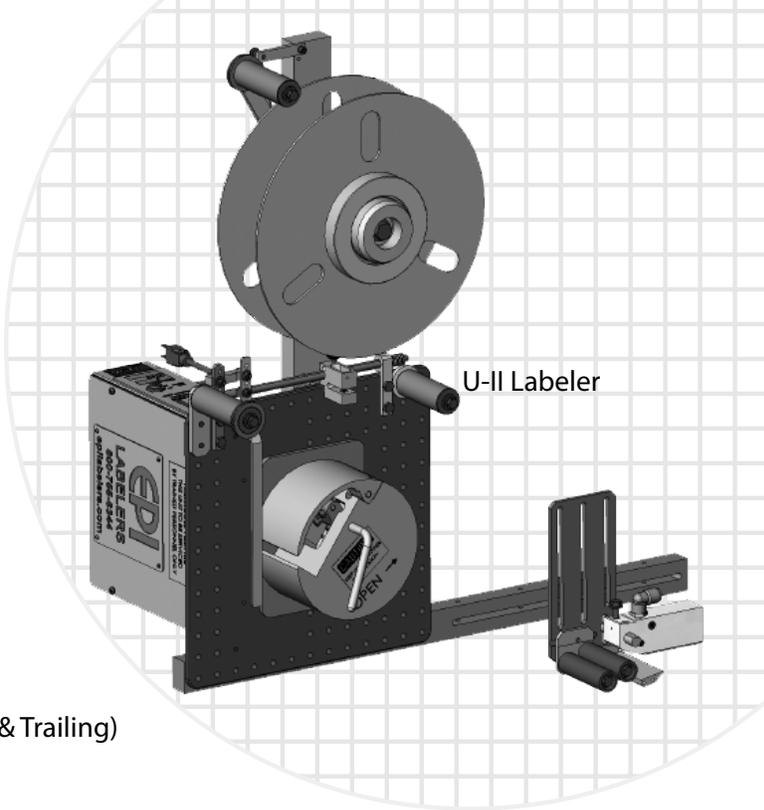

If viewing this document electronically, [click here](#) for additional information.

Precise Thinking. Simple Design. Simple - Precise - Durable. These words have defined our labeling and promotional inserting equipment since our inception in 1980. EPI labelers and promotional inserters are used in a wide variety of industries from food packaged in flexible material to warehouse case labeling. Our equipment integrates with a wide variety of packaging equipment, is easy to operate and will give you years of dependable service.

Customer Commitment: Our design and service teams know that the simpler the design the less likely you are to have costly downtime. We are proud to offer our customers PMMI certified training. If you should require after sale service our technicians are available for both on site and phone service and will stick with you to solve the problem. Our extensive inventory of parts allows us to ship most parts orders the same day to minimize your downtime.

